

# Lenco

## INSTRUCTION MANUAL

Headset with Bluetooth


MODEL: BH-100



[www.lenco.com](http://www.lenco.com)

# HEADSET OVERVIEW

- ① Power switch
- ② Volume up & Next song
- ③ Volume down & Previous song
- ④ Microphone
- ⑤ LED Indicator Light
- ⑥ Charging socket

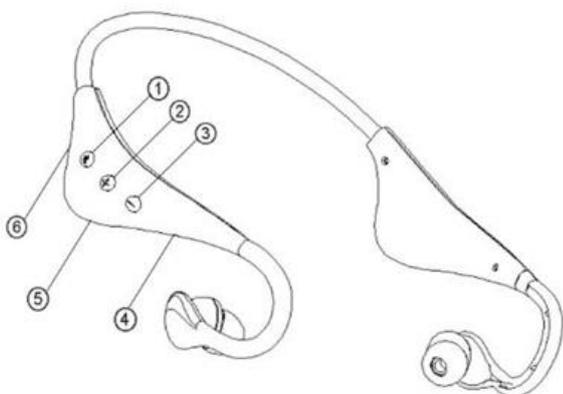

## OPENNING INSTRUCTIONS

### Charging the headset

1. Your headset uses a rechargeable built-in battery, make sure the headset is fully charged before using it for the first time.
2. Connect the USB cable to the charging socket, the headset can be charged.
3. During charging, the LED indicator light remains red, when charging completed, it turns to blue.

### Turning the headset on

1. Press the power switch button for 3 seconds in shutdown mode, the blue indicator light flashes 5 times and you will hear prompt tone.

### Turning the headset off

1. Press the power switch button for 5 seconds in standby mode, the blue indicator light flashes 5 times rapidly and you will hear prompt tone.

## Pairing and Connecting the headset with a phone

1. Press and hold the power switch button about 7-9 seconds until you see the blue and red indicator light flashes rapidly and continually by turns, then release the button.
2. Activate the Bluetooth feature on your phone and search for the headset.
3. Select the headset (Lenco BH-100 ) from the list of devices found by your phone.
4. When pairing successfully, the indicator light will stop flashing, the blue indicator light flashes once every 3 seconds in standby mode.

## Reconnecting the headset with a phone

1. Your headset will attempt to reconnect automatically each time you turn it on, but this feature may be unavailable on some devices, you can try to reconnect from paired devices on phone.

## Answering a call

1. Short press the power switch button to answer a call when you hear incoming call tones.
2. When you are listening to music, the music stops during a call.

## Ending a call

1. Short press the power switch button to end a call.

## Rejecting a call

1. Press the power switch button for 2 seconds to reject a call when a call comes in.

## Redialing the latest call

1. Short press the power switch button for 2 times continually, and then it will make a call to the latest number you dialed.

## Volume Control

1. Long press the volume up or down button to adjust the volume.
2. You will hear a beep when volume level of the headset reaches its' highest level.

## Play or Pause music

1. Press the power switch button to select play/pause the song

## Previous or Next song

1. Short press and then release the previous/next song button to select previous/next song.
2. While playing the song, 'Short press and release' the previous song button only go to the beginning of the current song, then 'Short press and release' button again to go to the previous song.

## TECHNISCHE DATEN

ITEM	SPECIFICATIONS
Driver Unit	10 mm
Impedance	16 Ohms
Frequency Response	20 Hz to 20KHz
S/N	88±5dB
Rated Power	3 mW
Max. output Power	30 mW
Max.Input Power	30 mW
Operating voltage range	3.0V-4.2V
Battery	Lithium 3.7V, 100mAh
Bluetooth-Version	Bluetooth v4.0
Mic Sensitivity	-42 ±3dB
Operating range	up to 33 feet(10 meters)
Standby time	up to 160hours
Talk/Play time	about 4 hours
Charging time	1.5 hours

\* Depending on the phone type and usage, the actual time may vary.

	<b>WARNING:</b> When participating in the traffic listening to a personal music player can make the listener less aware of potential dangers such as approaching cars.
	<b>WARNING:</b> To prevent possible hearing damage, do not listen at high volume levels for long periods.

This product operates at 2400 - 2483.5 MHz and is designated only to be used inside a normal household environment. This product is suited for this purpose within all EU counties.

Hereby, STL Group BV, Ankerkade 20 NL 5928 PL Venlo, declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

The declaration of conformity may be consulted at <https://lencosupport.zendesk.com/forums/22413161-CE-Documents>

## Service and support

For information: [www.lenco.com](http://www.lenco.com)

Lenco offers service and warranty in accordance to European law, which means that in case of repairs (both during and after the warranty period) you should contact your local dealer.

**Important note:** It is not possible to send products that need repairs to Lenco directly.


**Important note:** If this unit is opened or accessed by a non-official service center in any way, the warranty expires.

This device is not suitable for professional use. In case of professional use, all warranty obligations of the manufacturer will be voided.



Products with the CE marking comply with the EMC Directive (2004/108/EC) and the Low Voltage Directive (2006/95/EC) issued by the Commission of the European Community.

The declaration of conformity may be consulted at <https://lencosupport.zendesk.com/forums/22413161-CE-Documents>

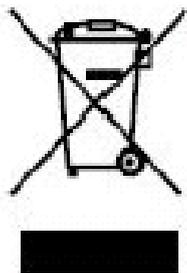

This symbol indicates that the relevant electrical product or battery should not be disposed of as general household waste in Europe. To ensure the correct waste treatment of the product and battery, please dispose them in accordance to any applicable local laws of requirement for disposal of electrical equipment or batteries. In so doing, you will help to conserve natural resources and improve standards of environmental protection in treatment and disposal of electrical waste (Waste Electrical and Electronic Equipment Directive).

® All rights reserved